

# Model 6600-TC



## Keyboard Monitor Drawer



### FEATURES

- **RETMA 2U Height**
- **Full Windows 95 Keyboard**
- **Touch Pad Pointing Device**
- **Flat Panel Monitor, 10.4" TFT**
- **Standard VGA Interface**



### DESCRIPTION

The 6600 series monitor keyboard combination offers a full size keyboard and touch pad pointing device along with a 10.4" active matrix color flat panel VGA monitor within a single drawer unit. In only 3.5" of rack space all the features required for interfacing with any standard PC computer are available in a pull out drawer. For system security the drawer may be locked into place in the rack. If security is not a concern, simply leave it unlocked and

fully accessible on a moment's notice. If you need to control several PC's in the smallest possible amount of space the 6600 series can be attached via expanders such as the Cybex series available through Industrial Computer Source. The flat panel driver also offers a second VGA connector at the rear panel to plug in a standard VGA monitor for a secondary simultaneous display.

### SPECIFICATIONS

#### Keyboard

Cherry 104 Key, PS/2 connector with Adapter to AT Mini-DIN

#### Pointing Device

Synaptics Touchpad and Two Buttons  
Microsoft Mouse Compatible  
Drivers for DOS, Windows 3.1, and Windows 95  
Included  
Updated Drivers Available at <http://www.synaptics.com>  
PS/2 Connector with Adapter to DB9S

#### Monitor

LCD, Sharp LQ10D421  
Active Matrix VGA Color  
DB15 Analog Connection  
Output Connector for Second Monitor with Simultaneous Display  
Supported by Most Standard (S)VGA Video Adapters

#### Resolution

640x480, 256k Color

#### Display Size

10.4" Diagonal (260mm)

#### Viewing Area

8.3" x 6.23" (211.2 x 158.4mm)

#### Luminance (White)

240 cd/m<sup>2</sup>  
Viewing Angle  
60° From Center Horizontal Min  
35° From Center Vertical Min

## SPECIFICATIONS CONT.

### MONITOR ENVIRONMENTAL CONDITIONS

#### Operation

0° to 50°C (Max 40° at 95% R.H.N.C.)

#### Storage

-25° to 60°C

#### Backlight

Double CCFT (Cold Cathode Fluorescent Tube)  
Replaceable

#### Backlight MTBF

25000 Hours @25°C

#### 6600 Dimensions (H x W x D)


3.45" x 19" x 20"  
(87.6 x 483 x 508mm)

#### Power Requirement

85VAC to 264VAC, 47 to 440Hz  
40 Watts

#### Agency Approval

UL Recognized Component

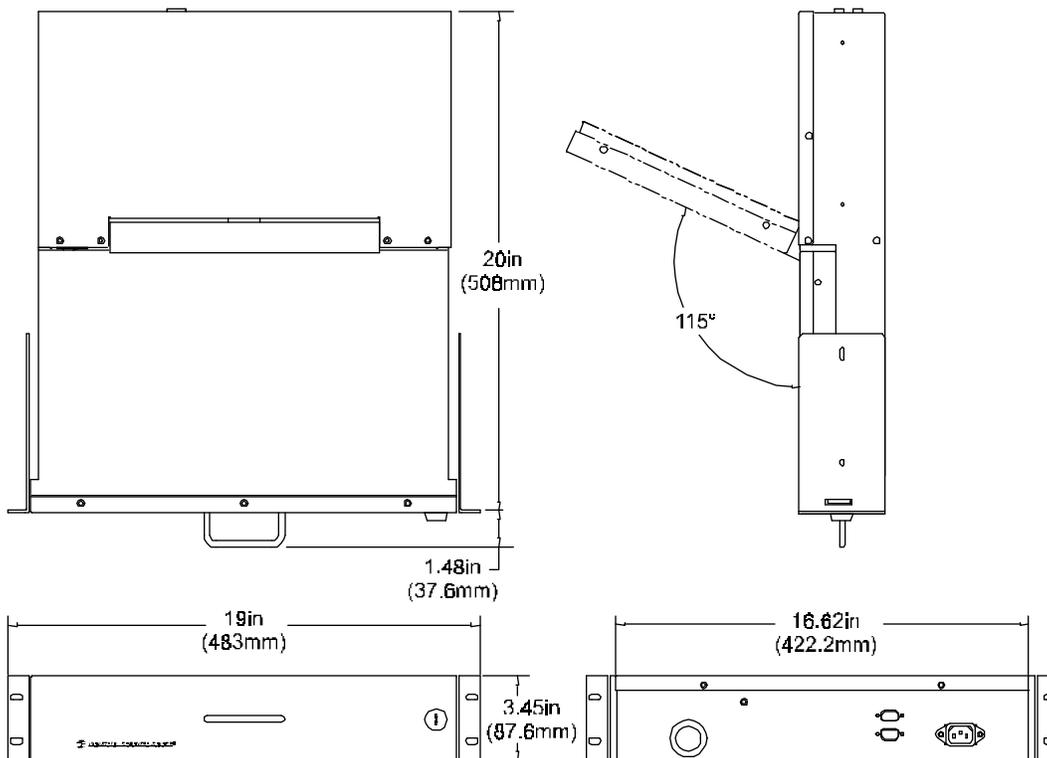

## ORDERING GUIDE

### Model 6600-TC

Keyboard, Active Matrix Monitor, Pointing Device, Manual, Driver Disk, Adapter Cables to AT Keyboard and Pointing Device DB9S



**INDUSTRIAL COMPUTER SOURCE®**

9950 Barnes Canyon Rd. San Diego, CA 92121

**1-800-523-2320**