


# Model SPORTSTER336I



## U.S. Robotics Sportster V.34 28.8 & 33.6 Faxmodem

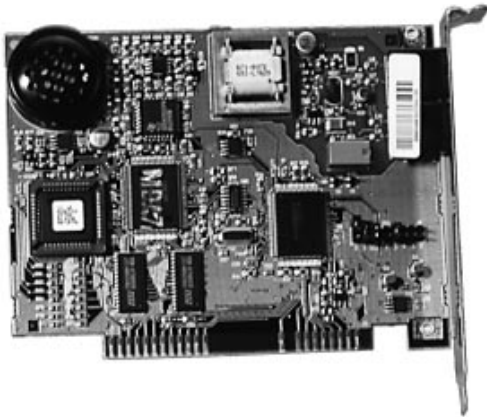

### FEATURES

- **Supports True ITU-T V.34 at 28,800 and 33,600 bps, ITU-T V.32 bis at 14,400 bps, Backward Compatible with Slower Speeds Down to 300 bps.**
- **V.42/MNP 2-4 Error Control and V.42 bis/MNP 5 Data Compression for Error-Free Throughput up to 115,200 bps with any Communication Software.**
- **Supports V.17 Group III fax at 14,400 bps.**
- **Includes Integrated QuickLink II FAX™ Communication/Fax Software for DOS and Windows®.**

### DESCRIPTION

#### Works well with others

Access the server at the main office. Dial up a supplier or a customer. Sign on to an online service or bulletin board. Sportster is fully compatible with national and international data communication standards.

- Pull-down menus make it easy to control all data and fax functions from your PC.
- Uses regular public phone lines.
- Works with popular communications software.
- Works with all popular computers and terminals.
- Comes with special offers from major online services.
- Comes with free Internet Connection Kit.

#### Count on it

Sportster is more than just simple to install and to use. It's simply more reliable than "clone" modems. Inside every Sportster is the same proven U.S. Robotics technology that companies like Eastman Kodak, DuPont and CompuServe depend on year after year. So even if you don't have corporate backups or support to count on, you know you can count on your Sportster.

#### More than the sum of their parts

Sportster high speed modems are more than hardware and software. They're the most powerful, compatible, reliable modems designed and priced for the economy-minded user. They're made to meet the standards data communications professionals expect from all U.S. Robotics products. Take a look at the technical specifications.

## SPECIFICATIONS

---

### High Speed Data

28.8 and 33.6 Kbps

### High Speed Fax

V.17 Group III 14,400 and 9600 bps send and receive fax

### Maximum Throughput

115,200 bps

### Universal Compatibility

True ITU-T V.34 at 28,800 and 33,600 bps, V.FC at 28,800 bps

ITU-T V.32 bis at 14,400 bps

ITU-T V.32 at 9600 bps

ITU-T V.22 bis at 2400 bps

ITU-T V.22 and Bell 212A at 1200 bps

ITU-T V.21 and Bell 103 at 300 bps

### Error Control and Data Compression

ITU-T V.42/MNP 2-4 hardware-based error control

ITU-T V.42 bis/MNP 5 hardware-based data compression.

### Dimensions

**External:** 6.5" wide, 3.75" deep, 1.5" tall

**Internal:** PC-bus half card

## ORDERING GUIDE

---

### Model SPORTSTER336I

Internal modem, phone cord, manuals, software

### Model SPORTSTER336E

External modem, AC adapter, phone cord, manuals, software



**INDUSTRIAL COMPUTER SOURCE®**

9950 Barnes Canyon Rd. San Diego, CA 92121

**1-800-523-2320**